

# Dual variable methods for mixed-hybrid finite element approximation of the potential fluid flow problem in porous media

Mario Arioli<sup>1</sup>, Jiří Maryška<sup>2</sup>, Miro Rozložník<sup>3</sup>, and Mirek Tůma<sup>3</sup>

## ABSTRACT

Mixed-hybrid finite element discretization of the Darcy's law and the continuity equation that describe the potential fluid flow problem in porous media leads to symmetric indefinite linear systems with a particular block structure. In this paper we consider an approach for a solution of such systems based on the computation of a null-space basis of the whole or of a part of the left lower off-diagonal block in the system matrix and on the subsequent iterative solution of a projected system. A fundamental cycle null-space basis of the whole off-diagonal block is constructed using the spanning tree of an associated graph. It is shown that such basis may be theoretically rather ill-conditioned while the orthogonal null-space basis of its certain sub-block can be easily constructed. In the former case, the resulting projected system is symmetric positive definite and so the conjugate gradient method can be applied. The projected system in the latter case remains indefinite and the minimal residual method (or the smoothed conjugate gradient method) should be used. The theoretical rate of convergence for both algorithms is discussed and their efficiency is compared in numerical experiments.

**Keywords:** Augmented systems, sparse matrices, mixed finite elements, mixed-hybrid formulation.

**AMS(MOS) subject classifications:** 65F05, 65F50.

---

Current reports available by anonymous ftp to <ftp.numerical.rl.ac.uk> in directory `pub/reports`.

<sup>1</sup> [M.Arioli@rl.ac.uk](mailto:M.Arioli@rl.ac.uk), Rutherford Appleton Laboratory,

<sup>2</sup> [jiri.maryska@vslib.cz](mailto:jiri.maryska@vslib.cz), Technical University of Liberec, Department of Modelling of Processes, Hálkova 6, CZ-461 17 Liberec, Czech Republic.

<sup>3</sup> [miro@cs.cas.cz](mailto:miro@cs.cas.cz), [tuma@cs.cas.cz](mailto:tuma@cs.cas.cz), Institute of Computer Science, Academy of Sciences of the Czech Republic, Pod vodárenskou věží 2, 182 07 Prague 8, Czech Republic.

This work was supported by the Grant Agency of the Academy of Sciences of the Czech Republic under grant No. A1030103 and by the Grant Agency of the Czech Republic under grant No. 101/00/1035. A part of this work was done during the visit of the third and fourth author at Istituto di Analisi Numerica, Consiglio Nazionale delle Ricerche, Pavia, Italy.

Computational Science and Engineering Department

Atlas Centre

Rutherford Appleton Laboratory

Oxon OX11 0QX

January 2, 2001

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Approach based on a null-space basis of the matrix block <math>(B \ C)^T</math></b>	<b>4</b>
2.1	Step 1 . . . . .	4
2.2	Step 2 . . . . .	10
2.3	Step 3 . . . . .	11
2.4	Step 5 . . . . .	12
<b>3</b>	<b>Approach based on a null-space basis of the matrix block <math>C^T</math></b>	<b>12</b>
3.1	Step 1 . . . . .	12
3.2	Step 2 . . . . .	13
3.3	Step 3 . . . . .	14
3.4	Step 5 . . . . .	17
<b>4</b>	<b>Numerical experiments</b>	<b>17</b>
<b>5</b>	<b>Conclusions</b>	<b>23</b>
<b>6</b>	<b>Acknowledgment</b>	<b>25</b>

# 1 Introduction

The steady-state equation for the potential fluid flow in porous media combines Darcy's law for the velocity  $\mathbf{u}$  with the continuity equation

$$\mathbf{A}\mathbf{u} = -\nabla p, \quad \nabla \cdot \mathbf{u} = q, \quad (1.1)$$

where  $p$  is a piezometric potential (fluid pressure),  $\mathbf{A}$  is a symmetric and uniformly positive definite second rank tensor of hydraulic permeability of the medium and  $q$  represents density of potential sources in the medium. Consider a bounded connected domain  $\Omega$  in  $\mathcal{R}^3$  with Dirichlet and Neumann boundary conditions

$$p = p_D \quad \text{on} \quad \partial\Omega_D, \quad \mathbf{u} \cdot \mathbf{n} = u_N \quad \text{on} \quad \partial\Omega_N, \quad (1.2)$$

where  $\partial\Omega = \overline{\partial\Omega_D} \cup \overline{\partial\Omega_N}$  are such that  $\partial\Omega_D \neq \emptyset$ ,  $\partial\Omega_D \cap \partial\Omega_N = \emptyset$  and  $\mathbf{n}$  is the outward normal vector defined (almost everywhere) on the boundary  $\partial\Omega$ . Further assume that  $\Omega$  is divided into a collection of subdomains such that every subdomain is a trilateral prism with vertical faces and general nonparallel bases (see, e.g., Kaasschieter and Huijben, 1992, Maryška, Rozložník and Tůma, 1995 or Maryška, Rozložník and Tůma, 1996). We consider a uniform regular mesh with the discretization parameter  $h$  and the low order Raviart-Thomas finite element approximation (for details we refer to Kaasschieter and Huijben, 1992, Maryška et al., 1995). Using of a such discretization technique leads to a solution of a symmetric indefinite system of linear algebraic equations in the form

$$\begin{pmatrix} A & (B \ C) \\ (B \ C)^T & \end{pmatrix} \begin{pmatrix} u \\ p \\ \lambda \end{pmatrix} = \begin{pmatrix} q_1 \\ q_2 \\ q_3 \end{pmatrix}, \quad (1.3)$$

where  $u = (u_1, \dots, u_{5*NE})^T$ ,  $p = (p_1, \dots, p_{NE})^T$ ,  $\lambda = (\lambda_1, \dots, \lambda_{NIF+NNC})^T$  are unknowns;  $NE$  denotes the number of elements,  $NIF$  is the number of interior inter-element faces,  $NNC$  denotes the number of faces with prescribed Neumann boundary condition and  $NDC$  denotes the number of faces with Dirichlet boundary condition ( $NDC \neq 0$ ). Note that for the total number of faces it follows  $5 * NE = 2NIF + NDC + NNC$ . Further we assume some enumeration of elements in the mesh so that the global position of every face and its corresponding entries in the matrices is given by the position of the element in the enumeration and by its local position on the element. The matrix block  $A \in \mathcal{R}^{5*NE, 5*NE}$  is symmetric positive definite and from the analysis in (Maryška et al. 1996) it follows that its spectrum lies in the interval

$$\sigma(A) \subset \left[ \frac{c_1}{h}, \frac{c_2}{h} \right], \quad (1.4)$$

where  $c_1$  and  $c_2$  are positive constants independent of the discretization parameter  $h$ . The off-diagonal block  $B \in \mathcal{R}^{5*NE, NE}$  is the face-element incidence matrix (with weights equal to  $-1$ ) and therefore it is, up to the normalization coefficients  $\sqrt{5}$ , an orthogonal matrix. The matrix

block  $C$  has the form  $C = (C_1 \ C_2) \in \mathcal{R}^{5*NE, NIF+NNC}$ , where the matrix block  $C_1$  represents the discrete continuity equation for the fluid velocity across interior inter-element faces and where  $C_2$  stands for fulfilment of the Neumann boundary conditions (for details we refer to Maryška et al., 1995, Maryška et al., 1996). Both matrix blocks  $C_1$  and  $C_2$  are orthogonal (the block  $C_1$  is orthogonal up to the normalization coefficients  $\sqrt{2}$ ), and also the block  $C$  itself is, up to the normalization coefficients corresponding to the columns of  $C_1$ , orthogonal. The normalization coefficients do not play an important role here and eventually may be circumvented by a proper scaling of their columns and corresponding rows in the system matrix (1.3) or later in (1.6)). The condition number of the whole off-diagonal matrix block  $(B \ C)$  (the ratio between the largest and the smallest singular values) is, however, dependent on the mesh size  $h$  (Maryška et al. 1996) and for its singular values we have

$$sv(B \ C) \subset [c_3 h, c_4]; \quad (1.5)$$

here  $c_3$  and  $c_4$  are again positive constants independent of the discretization parameter  $h$  (Maryška et al. 1996). If we consider the symmetric diagonal scaling of the whole indefinite system (1.3) in the form

$$\begin{pmatrix} \mathbf{A} & (B \ C) \\ (B \ C)^T & \end{pmatrix} = \begin{pmatrix} h^{1/2} & \\ & h^{-1/2} \end{pmatrix} \begin{pmatrix} A & (B \ C) \\ (B \ C)^T & \end{pmatrix} \begin{pmatrix} h^{1/2} & \\ & h^{-1/2} \end{pmatrix}, \quad (1.6)$$

then the inclusion set for the spectrum of the positive definite matrix block  $\mathbf{A}$  becomes independent of the parameter  $h$  with  $\sigma(\mathbf{A}) \subset [c_1, c_2]$ , while the off-diagonal matrix block  $(B \ C)$  remains untouched with the bound (1.5) which is now the only part of the system matrix (1.6) dependent on the mesh size  $h$ . We note here again, that its sub-blocks  $B$  and  $C$  are matrices with orthogonal set of columns. In addition to this, when the conditioning of the matrix  $\mathbf{A}$  itself is rather significant, prescaling of the matrix with its diagonal may lead to substantial improvements.

Linear systems similar to (1.6) have attracted recently a lot of attention, in a number of applications e.g. Navier-Stokes problems (Silvester and Wathen 1993), magnetostatic problems (Perugia, Simoncini and Arioli 1999), quadratic and nonlinear programming (Arioli, 2000*b*, Lukšan and Vlček, 1998) or porous media problems (Kaasschieter and Huijben, 1992, Bergamaschi, Mantica and Saleri, 1994). Several approaches for a solution of such systems have been considered. They range from the Uzawa-type iterative methods (Elman and Golub 1994), nonstationary conjugate gradient-type methods like the MINRES method (Paige and Saunders 1975) applied to the whole indefinite system (see e.g. Silvester and Wathen, 1993 or Maryška et al., 1996) or the conjugate gradient method applied to the Schur complement systems (Kaasschieter and Huijben, 1992, Maryška, Rozložník and Tůma, 2000). An approach based on the null-space method (using the sparse QR decomposition) combined with the iterative solver was presented in (Arioli 2000*b*). Another techniques are the multigrid approach (Elman, 1996, Wag-

ner, Kinzelbach and Wittum, 1997) or the direct solution based on the Bunch-Parlett or the  $LDL^T$ -factorization (Duff, Gould, Reid, Scott and Turner, 1991, Tůma, n.d.).

In this paper we consider an approach based on the computation of a null space basis of some off-diagonal block in the system matrix (1.6) and on subsequent iterative solution of the remaining part of a system projected onto the constructed null-space. We consider first the whole off-diagonal block  $(B \ C)^T$ . Fundamental cycle null-space basis is constructed using a spanning tree of a directed incidence graph related to the block  $(B \ C)^T$ . Resulting projected system is then symmetric positive definite and conjugate gradient or smoothed conjugate gradient method (minimal residual method) can be applied. Unfortunately, as we will show later, the constructed null-space basis may be potentially ill-conditioned and, therefore, the convergence rate of an iterative solver applied to the projected systems may be rather slow for large number of elements in the mesh. We want to take advantage of the structure of the submatrix

$$\begin{pmatrix} \mathbf{A} & B \\ B^T & \end{pmatrix}, \quad (1.7)$$

which is permutable in a block diagonal form where each of the  $NE$  diagonal blocks is of order 6 and has the structure of an augmented system. Therefore, we consider the approach based on a null-space basis of the block  $C^T$ . Since the matrix block  $C$  is orthogonal, one can very easily construct a null-space basis of  $C^T$ , which is moreover orthogonal as well. The projected system is now symmetric indefinite, and it is equivalent to the system obtained approximating the problem (1.1) with the boundary conditions (1.2) by the Raviart-Thomas mixed finite element method (Brezzi and Fortin 1992). For this symmetric indefinite problem, instead of pure conjugate gradient method its smoothed variant or, in other words, the minimal residual method is used. Its rate of convergence is estimated and linear asymptotic dependence on the mesh size  $h$  is shown. Thus such approach is asymptotically as efficient as other approaches like the Schur complement reduction (Kaasschieter and Huijben, 1992, Maryška et al., 2000) or the solution using some indefinite iterative solver on the whole system (1.3) (Silvester and Wathen, 1993, Maryška et al., 1996). In addition, for nonlinear schemes taking into account the transport of chemicals and/or saturation one usually has to solve a sequence of problems with the same topology, which is reflected only in the off-diagonal matrix blocks  $B$  and  $C$ . This may be in favor for the dual variable methods in general, because the null space of  $(B \ C)^T$  (or the null space of  $C^T$ ) can be computed once at the starting and used for projecting the gradient of the nonlinear function.

The outline of this paper is as follows. In Section 2 we focus on the approach based on the computation of a null-space basis of the whole block  $(B \ C)^T$ . We study the structural and spectral properties of a fundamental cycle null-space basis and based on these results, the theoretical convergence rate of the conjugate gradient method applied to the resulting projected system is estimated. In Section 3 we describe an approach based on a null-space basis of the block  $C^T$  and analyze the spectrum of a resulting indefinite matrix projected onto the

orthogonal null-space basis. Section 4 describes some numerical experiments which compares these two approaches. In Section 5 we give some conclusions and point out directions for the future research.

## 2 Approach based on a null-space basis of the matrix block $(B \ C)^T$

The dual variable method (Hall 1985) for computing the unknowns  $u$ ,  $p$  and  $\lambda$  in the system (1.3) is given in the following Algorithm.

**Algorithm 2.1** *The dual variable method for a solution of the system (1.3) - an approach based on a null-space of  $(B \ C)^T$ .*

*Step 1. Compute a null space basis  $Z$  of the matrix  $(B \ C)^T$  so that  $(B \ C)^T Z = 0$ .*

*Step 2. Find some solution  $u_1$  of the underdetermined system  $(B \ C)^T u_1 = (q_2^T, q_3^T)^T$ .*

*Step 3. Compute (iteratively)  $u_2$  from the projected system  $Z^T \mathbf{A} Z u_2 = Z^T (q_1 - \mathbf{A} u_1)$ .*

*Step 4. Set  $u = u_1 + Z u_2$ .*

*Step 5. Find the unknown vectors  $p$  and  $\lambda$  such that  $(B \ C) \begin{pmatrix} p \\ \lambda \end{pmatrix} = q_1 - \mathbf{A} u$ .*

### 2.1 Step 1

The most critical component of Algorithm 2.1 is Step 1. There exist several approaches how to compute a null space basis  $Z$ . Some of them are tightly coupled with particular applications. An extensive overview of null space basis algorithms based on standard dense matrix decompositions is given in (Heath, Plemmons and Ward 1984). A possible way to compute a null space basis of an equilibrium matrix in structural optimization is based on looking for a set of cycles in a suitably defined graph, see e.g. (Henderson and Maunder 1969), (Pothen 1989). The cycle null space basis can be found efficiently using various techniques (see, e.g., Plemmons and White, 1990, Deo, Prabhu and Krishnamoorthy, 1982, Cassell, de C. Henderson and Kaveh, 1974, Kaveh, 1984). Special attention should be paid to the approach used for solving two-dimensional problems in computational fluid dynamics (see Amit, Hall and Porsching, 1981, Hall, 1985 and Burkardt, Hall and Porsching, 1986). These techniques use network algorithms to find a suitable cycle null space basis for a discrete divergence matrix which comes from certain finite difference discretizations.

First we briefly recall the basic terminology used in the following text. In our description we will use a slightly generalized concept of a graph by allowing more edges between a pair of vertices. This generalization is commonly called a multigraph, but since all the standard tools for graphs which we use can be trivially extended to multigraphs we will not emphasize this difference later.

**Definition 2.1** Let  $G = (V, E)$  be a connected directed graph with  $|V|$  vertices and  $|E|$  edges such that  $|E| - |V| + 1 > 0$ . Then the vertex-edge incidence matrix of the graph is  $|V| \times |E|$  matrix with a row associated to each vertex and a column associated to each edge. The column associated with edge  $(i, j)$  has only two nonzero entries, a "1" entry in the row associated to vertex  $i$  and a "-1" entry in the row associated with vertex  $j$ .

We start with a definition of a cycle null space basis of a graph.

**Definition 2.2** Let  $G = (V, E)$  be a connected directed graph such that  $|E| - |V| + 1 > 0$ . Then the columns of the cycle basis are given by a set of  $|E| - |V| + 1$  linearly independent edge incidence vectors that correspond to some cycles in the graph  $G$ . These incidence vectors have the  $i$ -th component equal to  $+1$  if  $e_i$  is an edge in the cycle and the orientations of the cycle and  $e_i$  agree, equal to  $-1$  if  $e_i$  is an edge in the cycle and the orientations disagree, and equal to  $0$  if  $e_i$  is not an edge in the cycle.

Since the cycle basis is formally defined for a graph we will not distinguish between the basis of the graph and the basis formed from the columns of its incidence matrix. The concept of fundamental cycle basis is based on the notion of a spanning tree defined as follows.

**Definition 2.3** A spanning tree of a connected directed graph  $G = (V, E)$  is a connected sub-graph of  $G$  with  $|V|$  vertices and  $|V| - 1$  edges.

Note that in the previous definition we did not consider the fact that the edges are oriented. In the following we define the fundamental cycle basis.

**Definition 2.4** A cycle basis is fundamental if it is obtained from a spanning tree  $T$  of the graph in such a way that each cycle in the basis has exactly one non-tree edge  $e$  and its other edges lie on the unique path in  $T$  connecting the vertices of the edge  $e$ .

The following lemma introduces a graph which will be used for enumeration of the cycle null space basis vectors in our application.

**Lemma 2.1** Denote by  $S$  the matrix obtained from  $(B \ C)^T$  by removing the rows corresponding to Neumann boundary conditions, removing the columns corresponding to faces with Neumann boundary conditions and adding a row which has ones in all the positions corresponding to faces with Dirichlet boundary condition. Then  $S$  is an incidence matrix of some directed graph  $G_S = (V_S, E_S)$ .

*Proof.* The columns and rows of the matrix  $(B \ C)^T$  can be reordered to an upper block triangular form with the unit diagonal block formed from the rows corresponding to Neumann boundary conditions and the columns corresponding to faces with Neumann boundary conditions. This means that the components of null space vectors corresponding to faces with Neumann boundary conditions must be zero. Therefore we do not need to consider their columns



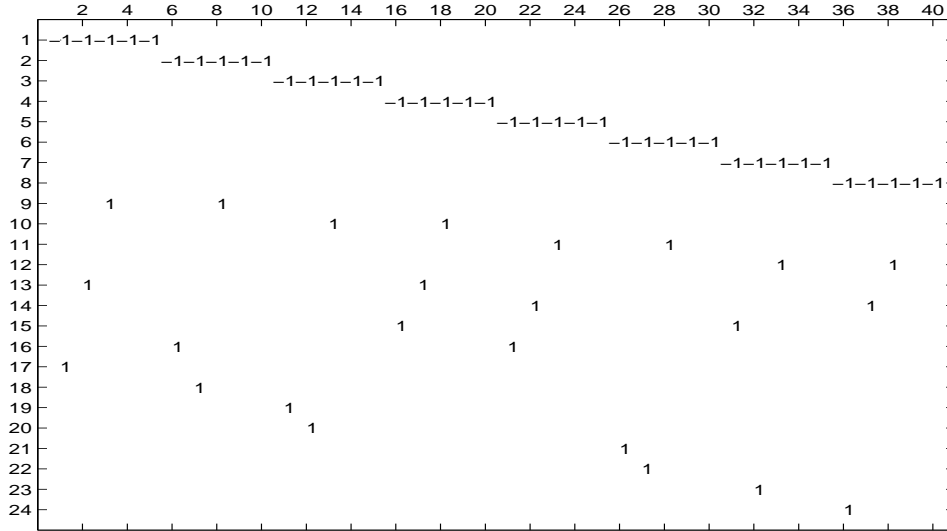


Figure 1: An example of an off-diagonal block  $(B C)^T$  for a simple test problem

and rows in the matrix  $(B C)^T$ . Denote by  $\tilde{S}$  the resulting matrix and let  $s^T$  be the row vector with components corresponding to faces with Dirichlet boundary condition equal to one and remaining components equal to zero. Then define  $S = \begin{pmatrix} \tilde{S} \\ s^T \end{pmatrix}$ . It is clear that  $S$  is an incidence matrix (with the column sum equal to zero) of some directed graph which we denote from now by  $G_S$ .  $\square$

An example of an off-diagonal block  $(B C)^T$  and the corresponding matrix  $S$  is shown in Figure 1 and Figure 2, respectively. Figure 3 depicts the corresponding graph  $G_S$ .

If we find a fundamental cycle basis to the graph of the incidence matrix  $S$  we can easily extend it to the null space basis of  $(B C)^T$ . We border  $Z_S$  with rows of zero in correspondence of the columns in  $(B C)^T$  relative to the edges of the Neumann boundary conditions. Therefore, we can pay our attention to the matrix  $S$  only. For easier reference we will formulate it as a proposition.

**Proposition 2.1** *Let  $Z_S$  be a null space basis of  $S$ . Then the null space basis  $Z$  of  $(B C)^T$  can be obtained from  $Z_S$  by adding zero rows to positions of faces with Neumann boundary condition.*

For large and sparse problems it is important to keep sparsity of the null space basis as much as possible. The problem to find the sparsest null-space basis for a given matrix is NP-hard (Garey and Johnson, 1979, Coleman and Pothén, 1986). The sparsest null-space basis, however, may not be the most efficient way when solving our problem. Namely, it may be rather ill-conditioned. Therefore, an effort was devoted to computation of orthogonal null-space bases (see Arioli, 2000b). On the other hand, the sparse QR-decomposition may lead to rather dense

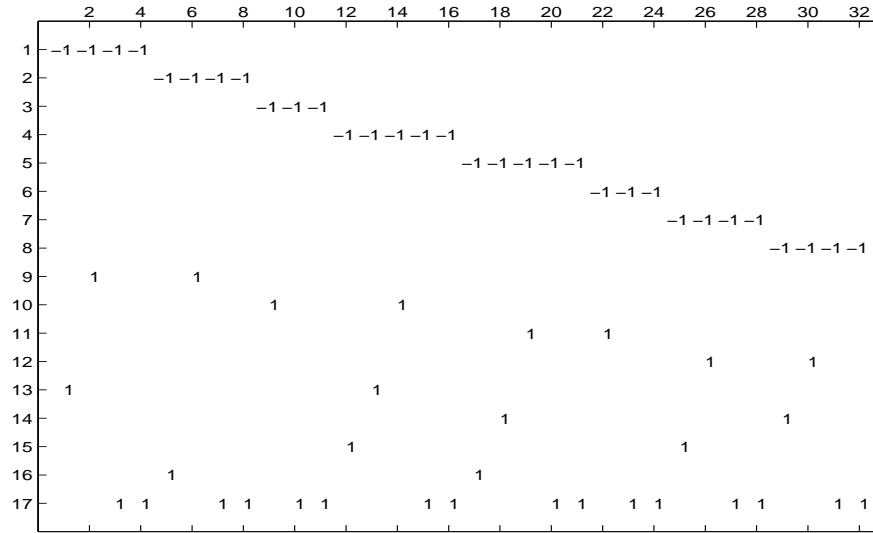


Figure 2: The matrix  $S$  constructed from the off-diagonal block  $(B C)^T$  in Figure 1

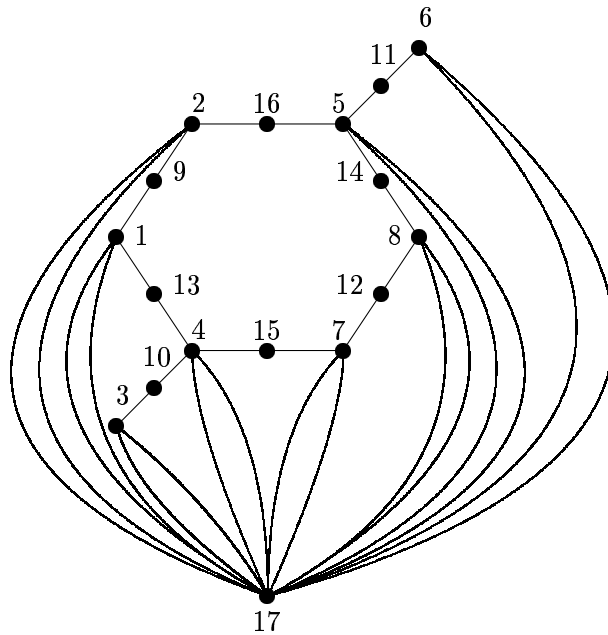


Figure 3: The graph  $G_S$  corresponding to the matrix  $S$  from Figure 2. Orientation of edges is not shown

and in practice infeasible factors. In this section we attempt to find a compromise between these two extremal cases. In particular, we would like to compute a relatively sparse null-space basis and, at the same time, to keep it sufficiently linearly independent.

We specify now more precisely how our fundamental cycle null space basis is constructed. The cycles in  $G_S$  here are determined using some spanning tree. By its choice one can influence the conditioning of the basis in a substantial way. We assume that the spanning tree is constructed using the Algorithm 2.2. In its description we use the technique of partitioning the graph nodes into  $n$  node sets  $(L_0, L_1, \dots, L_{n-1})$  which are called *level sets*. Starting with some initial node, which forms the initial level set  $L_0$ , the level set  $L_k$  is defined recursively as the set of all unmarked neighbouring nodes of all the nodes of a previous level set  $L_{k-1}$ . This technique is intensively used, e.g., for graph partitioning or in heuristics to find graph pseudoperipheral vertices (see Gibbs, Jr. and Stockmeyer, 1976, Saad, 1996).

**Algorithm 2.2** *Algorithm to construct the spanning tree  $T = (V_S, E_T)$  of the graph  $G_S = (V_S, E_S)$ .*

*Step 1. Find a level set partitioning  $(L_0, L_1, \dots, L_{n-1})$  of  $G_S$  starting from an arbitrary node  $x \in V_S$ .*

*Step 2. For all components of subgraphs induced by a level set partitioning construct an arbitrary spanning tree. Add all these edges of every spanning tree into  $E_T$ .*

*Step 3. Connect the set of edges  $E_T$  into a spanning tree of the whole graph  $G_S$ .*

This construction guarantees that there are no cycles in the graph  $G_S$  which would use nodes from more than two levels of the partitioning. The whole process of construction is schematically depicted in Figure 4. The situation after Step 2 in Algorithm 2.2 is illustrated on the left-hand side and the spanning tree of  $G_S$  after Step 3 is depicted on the right-hand side. The edges of the spanning tree are denoted by double lines.

In the following we study the conditioning of the null-space basis constructed using the spanning tree from Algorithm 2.2. We give bounds on extremal singular values of the matrix  $Z_S$ . In particular, we are interested in their asymptotic behavior with respect to the discretization parameter  $h$  under uniformly regular refinement of the mesh.

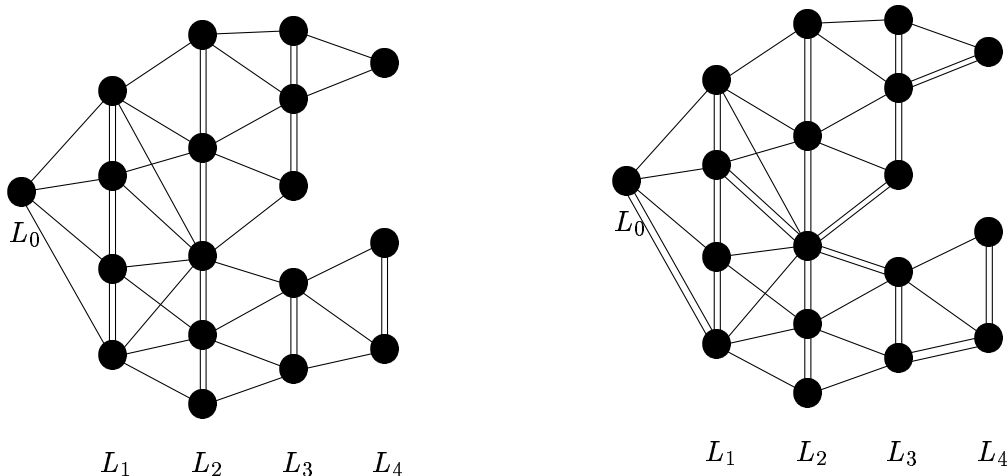


Figure 4: Graph with level sets and spanning tree edges after Steps 2 and 3 of Algorithm 2.2

**Theorem 2.2** Let  $Z_S$  be a matrix with fundamental cycle null-space basis vectors induced by the spanning tree from Algorithm 2.2. Let  $\sigma_{max}(Z_S) \geq \sigma_2(Z_S) \geq \dots \geq \sigma_{min}(Z_S) > 0$  be the singular values of  $Z_S$ . Then there exist a constant  $c_5$  such that  $\sigma_{max}(Z_S) \leq c_5 h^{-2}$ .

*Proof.* In a uniform mesh the ratio between the internal and the external diameters of any element is independent of  $h$  and both diameters are of order  $O(h)$ . Then, the number of elements in each direction is independent of the direction. Algorithm 2.2 computes a “Shortest Path Spanning Tree” for the graph  $G_S$  where each arc has length 1. Therefore, the value of a level set is also the value of the minimum distance of any of its node from the root. Such a distance is equal to the number of elements in the mesh that we cross going from a node in the level set to a node corresponding to a boundary elements directly connected to root. Because of the uniformity of the mesh this number is in the worst case of order  $O(h^{-1})$ . The nodes in a level set map into a wavefront in the mesh, therefore, the number of nodes in a level set is in the worst case of order  $O(h^{-2})$ . Since  $Z_S$  is a cycle null-space basis, its Frobenius norm is determined by the count of its nonzero entries. Each column of  $Z_S$  corresponds to an arc which is not in the tree and the number of non zeros in the column is the length of the shortest cycle formed using the nodes on the tree and the arc. Because the max distance of a node in the tree from the root is of order  $O(h^{-1})$  the maximum length of the cycle is  $O(h^{-1})$ . The total number of arcs out of tree is  $O(h^{-3})$ . Then, the number of nonzeros in  $Z_S$  is of order  $O(h^{-4})$ . Hence there exists a positive constant  $c_5$  such that  $\sigma_{max}(Z_S) = \|Z_S\| \leq \|Z_S\|_F \leq c_5 h^{-2}$ .  $\square$

**Theorem 2.3** Let  $\sigma_1(Z_S) \geq \sigma_2(Z_S) \geq \dots \geq \sigma_{min}(Z_S) > 0$  be the singular values of the matrix  $Z_S$  given by the fundamental cycle null-space basis vectors  $Z_S$ . Then  $\sigma_{min}(Z_S) \geq 1$ .

*Proof.* From the Courant-Fischer theorem we have

$$\sigma_{\min}(Z_S) = \min_{\dim(S)=1} \max_{x \in S, x \neq 0} \frac{\|Z_S x\|}{\|x\|} \geq \min_{\|x\|=1} \|Z_S x\|.$$

Because  $S$  is the incidence matrix of the graph  $G_S$ , there exist  $P_1$  and  $P_2$  permutation matrices (Murthy 1992) such that

$$P_1 S P_2 = \begin{pmatrix} L_1 \\ L_2 \end{pmatrix}^T,$$

with  $L_1$  non singular lower triangular matrix. Then

$$Z_S = \begin{pmatrix} -L_1^{-T} L_2^T \\ I \end{pmatrix}.$$

Since the matrix  $Z_S$  has a unit submatrix embedded, it always satisfies  $\|Z_S x\| \geq \|x\|$ . From this observation we obtain the desired result.  $\square$

The approach which we adopted is based on the concept of the fundamental cycle null space basis  $Z$  for which one could simply bound the smallest singular value of  $Z$  from below but then some growth in the norm of the matrix  $Z$  with the bound in Theorem 2.2 should be expected. Another approach which uses cycles of small lengths for the basis can fall into a different trap. While the norm of  $Z$  can be simply bounded by a constant times a maximum degree in the graph  $G_S$ , it is not easy to give a reasonable lower bound for the minimum singular value of  $Z$  in the case of general domain. Nevertheless, we do not exclude that such ill-conditioned null-space basis vectors may appear frequently in practical computations.

## 2.2 Step 2

The construction of a particular solution  $u_1$  in Step 2 of Algorithm 2.1 is considerably simpler than the construction of the null space basis (cf. Hall, 1985). Compute the uniquely determined components of the particular solution corresponding to the faces with the Neumann boundary conditions. Denote by  $F$  the matrix obtained from  $(B C)^T$  after elimination of these components and after removal of all columns corresponding to faces with a Dirichlet boundary condition. Construct a spanning tree  $T_F$  of its incidence graph  $G_F$  rooted in a vertex which corresponds to some element with a Dirichlet boundary condition. Then remove all non-tree columns (columns corresponding to non-tree edges) from  $F$ . The resulting matrix  $\hat{F}$  is then the incidence matrix of  $T_F$ . Therefore, the rows and columns of  $\hat{F}$  can be reordered into upper Hessenberg form such that the row corresponding to the root will be numbered first. Adding a linearly independent Dirichlet column related to the root we get a nonsingular upper triangular system. By solving this system and setting all the other non-tree and Dirichlet components to zero we get the desired particular solution  $u_1$ .

### 2.3 Step 3

For a solution of the projected system in Step 3 one may use the iterative conjugate gradient (Hestenes and Stiefel 1952) or the minimal residual method (Stiefel 1955). The theoretical rate of convergence has been thoroughly studied and the bounds for their error and/or residual norm has been given (see e.g. Hestenes and Stiefel, 1952, Saad, 1996). Here we consider the conjugate gradient method smoothed by the minimal residual smoothing, which is mathematically equivalent to the minimal residual method (Greenbaum 1997). If we apply this method to the symmetric and positive definite projected system, the residual norm of the  $n$ -th approximate solution  $u_2^n$  can be bounded as follows

$$\|Z^T(q_1 - \mathbf{A}(u_1 + Zu_2^n))\| \leq 2 \left( \frac{1 - 1/\sqrt{\kappa(Z^T \mathbf{A} Z)}}{1 + 1/\sqrt{\kappa(Z^T \mathbf{A} Z)}} \right)^n \|Z^T(q_1 - \mathbf{A}(u_1 + Zu_2^0))\|. \quad (2.8)$$

The bound (2.8) indicates that its rate depends strongly on the spectrum of the projected matrix  $Z^T \mathbf{A} Z$ . Using the bounds on the singular values of the null-space basis matrix  $Z$  constructed in Step 1 and using the bound for the eigenvalues of the positive definite matrix block  $A$  (1.4) with scaling (1.6) then we can obtain the following simple result on the eigenvalues of the matrix  $Z^T \mathbf{A} Z$ .

**Lemma 2.4** *Let  $Z_S$  be the fundamental null-space basis matrix induced by the spanning tree from Algorithm 2.2 and let  $Z$  be the null-space basis matrix of the block  $(B \ C)^T$  obtained from  $Z_S$  by adding zero rows corresponding to faces with Neumann boundary condition. Then for the eigenvalues of the matrix  $Z^T \mathbf{A} Z$  we have*

$$\sigma(Z^T \mathbf{A} Z) \subset [c_1, c_2 \frac{c_5^2}{h^4}]. \quad (2.9)$$

*Proof.* The statement of lemma follows from (1.4) and (1.6), from results given in the subsection Step 1 and from the inequality

$$c_1(Zx, Zx) \leq (Z^T \mathbf{A} Zx, x) \leq c_2(Zx, Zx),$$

which gives the relation between the spectrum of  $Z^T \mathbf{A} Z$  and the singular values of  $Z$ .  $\square$

Considering the bound (2.8) and Lemma 2.4 we have

$$\frac{\|Z^T(q_1 - \mathbf{A}(u_1 + Zu_2^n))\|}{\|Z^T(q_1 - \mathbf{A}(u_1 + Zu_2^0))\|} \leq 2 \left( \frac{1 - \frac{1}{c_5} \sqrt{\frac{c_1}{c_2}} h^2}{1 + \frac{1}{c_5} \sqrt{\frac{c_1}{c_2}} h^2} \right)^n. \quad (2.10)$$

For the asymptotic convergence factor then it follows from (2.10) that there exist a positive constant  $c_6$  independent of the discretization such that

$$\lim_{n \rightarrow \infty} \left( \frac{\|Z^T(q_1 - \mathbf{A}(u_1 + Zu_2^n))\|}{\|Z^T(q_1 - \mathbf{A}(u_1 + Zu_2^0))\|} \right)^{1/n} \leq 1 - c_6 h^2 + O(h^4). \quad (2.11)$$

## 2.4 Step 5

The vector  $(p^T, \lambda^T)^T$  in Step 5 of Algorithm 2.1 can be found as follows. Consider the spanning tree  $T_F$  of the matrix  $F$  and the upper triangular system constructed in Step 2 (see Subsection 2.2). The unknowns  $p$  and  $\lambda$  are then a solution of the system with a nonsingular lower triangular matrix obtained by transposing the matrix from Step 2. The components of the unknown vector  $\lambda$  corresponding to Neumann boundary conditions are determined accordingly from remaining rows of  $(B \ C)$ . The right hand-side vector is given as  $q_1 - \mathbf{A}u$  substituting for the vector  $u$  computed in Step 4.

## 3 Approach based on a null-space basis of the matrix block $C^T$

Since the off-diagonal matrix block  $C$  has orthogonal columns it is much easier to construct a null-space basis for the block  $C^T$  rather than for the whole block  $(B \ C)^T$ . In contrast to the previous approach, this basis can be chosen orthogonal and thus the condition number of the basis matrix is not dependent on the discretization parameter. Although we are splitting the potentially ill-conditioned matrix block  $(B \ C)$  into two matrix blocks with orthogonal columns, the spectrum of the remaining part of the indefinite system is dependent on the discretization parameter. Consequently, the rate of convergence of the minimal residual method applied to the projected system can be bounded in terms of the mesh size and it depends linearly on the uniform mesh refinement. The algorithm is given as follows.

**Algorithm 3.1** *The dual variable method for a solution of the system (1.3) - approach based on a null-space of  $C^T$ .*

*Step 1. Determine the null space basis  $Z$  of the matrix block  $C^T$  such that  $C^T Z = 0$ .*

*Step 2. Find some solution  $u_1$  of the underdetermined system  $C^T u_1 = q_3$ .*

*Step 3. Compute iteratively  $u_2$  and  $p$  from the projected system*

$$\begin{pmatrix} Z^T \mathbf{A} Z & Z^T B \\ B^T Z & \end{pmatrix} \begin{pmatrix} u_2 \\ p \end{pmatrix} = \begin{pmatrix} Z^T (q_1 - \mathbf{A}u_1) \\ q_2 - B^T u_1 \end{pmatrix}.$$

*Step 4. Set  $u = u_1 + Z u_2$ .*

*Step 5. Find the unknown  $\lambda$  such that  $C \lambda = q_1 - \mathbf{A}u - Bp$ .*

### 3.1 Step 1

The matrix block  $C$  has orthogonal columns and it has the form  $C = (C_1 \ C_2) \in \mathcal{R}^{5*NE, NIF + NNC}$ , where the block  $C_1$  has two nonzeros per column, corresponding to the interior inter-element faces between neighbouring elements in the mesh. The block  $C_2$  is just the face-Neumann boundary condition incidence matrix. Therefore it is easy to construct the null-space matrix  $Z$  such that  $C^T Z = 0$ . The resulting matrix  $Z = (Z_1 \ Z_2) \in \mathcal{R}^{5*NE, NIF + NDC}$  can be chosen

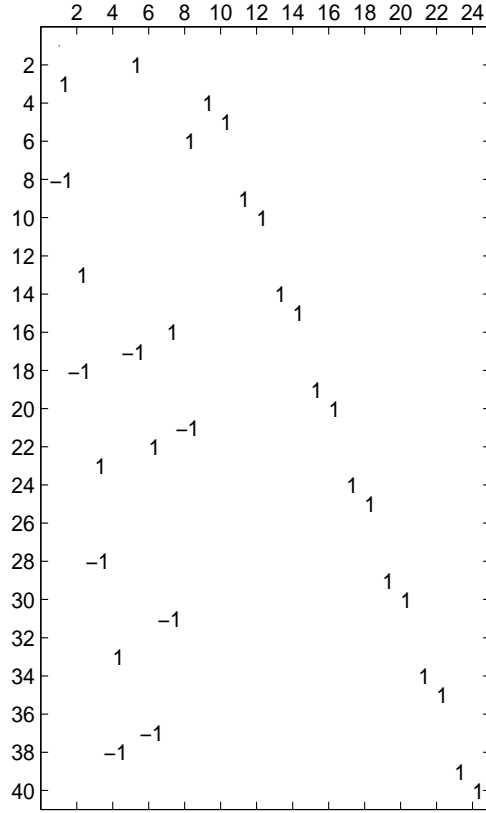


Figure 5: Null-space basis of the off-diagonal block  $C^T$  from our example in Figure 1

in the following way. The block  $Z_1 \in \mathcal{R}^{5*NE,NIF}$  will have two nonzeros per column (1 and -1) exactly on the same position as in the corresponding block  $C_1$ ; the block  $Z_2$  is the face-Dirichlet boundary condition incidence matrix. It is obvious that such matrix  $Z$  has orthogonal set of columns with  $Z^T Z = \text{diag}(2, \dots, 2, 1, \dots, 1)$  (which can be also orthonormalized). The null-space basis matrix  $Z$  for our example is given in Figure 5.

### 3.2 Step 2

The matrix block  $C$  has one entry per row, so the system  $C^T u_1 = q_3$  can be immediately solved by permuting its rows and columns to an upper trapezoidal form. In other words, we get immediately the unknowns that correspond to faces with the Neumann condition, and setting one of the two unknowns that stand for the interior inter-element faces, we can recompute the other. The remaining unknowns corresponding to Dirichlet faces are then set to zero.



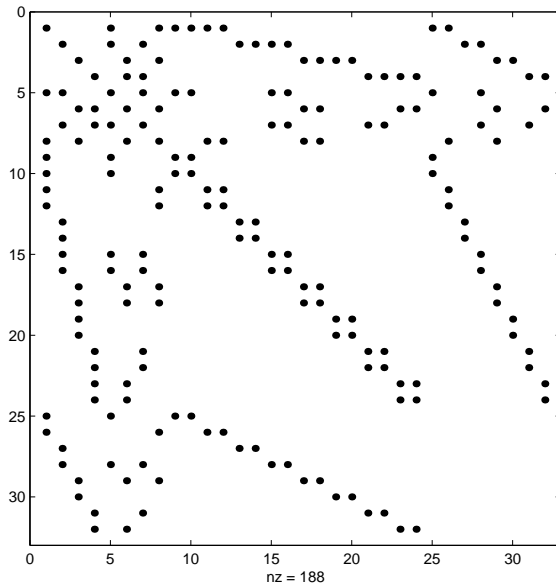


Figure 6: *Structural pattern of the projected matrix (3.12) from our simple problem*

### 3.3 Step 3

The projected system from Step 3 is symmetric but indefinite. Nevertheless, since the null-space basis matrix  $Z$  is chosen orthogonal, may be this approach very efficient. The projected system can be written as a result of an orthogonal projection applied to the remaining part of the indefinite system matrix in (1.6) in the form

$$\begin{pmatrix} Z^T \mathbf{A} Z & Z^T B \\ B^T Z & I \end{pmatrix} = \begin{pmatrix} Z^T & \\ & I \end{pmatrix} \begin{pmatrix} \mathbf{A} & B \\ B^T & \end{pmatrix} \begin{pmatrix} Z \\ I \end{pmatrix}. \quad (3.12)$$

The structural pattern of the resulting system for our example is depicted on Figure 6. The projected system (3.12) is still rather sparse, so its iterative solution may be a reasonable option. Moreover, the expression given by (3.12) shows that we can implement the matrix-vector product quite efficiently in parallel. The product  $Zv$  is equivalent to a permutation of the vector  $v$ , and the product  $Z^T w$ , because the rows of the matrix  $Z^T$  are structurally orthogonal, can be implemented in parallel. Furthermore, the matrix

$$\begin{pmatrix} \mathbf{A} & B \\ B^T & \end{pmatrix}$$

can be symmetrically permuted in a block diagonal form with diagonal blocks of size 6. Here we consider the conjugate gradient method smoothed by the minimal residual smoothing (Greenbaum 1997). It is well known that the rate of convergence of symmetric iterative methods depends strongly on the eigenvalue distribution of the system matrix (Saad, 1996, Greenbaum, 1997). In the following we analyze the spectrum of the matrix in the projected system (3.12).

**Lemma 3.1** *Let  $Z$  be the null-space basis of the off-diagonal block  $C^T$  constructed in Step 1 of Algorithm 3.1. Then for the spectrum of the projected matrix block  $Z^T \mathbf{A} Z$  it follows  $\sigma(Z^T \mathbf{A} Z) \subset [c_1, 2c_2]$ .*

*Proof.* The proof of the lemma is similar to the proof of Lemma 2.4 provided that  $Z^T Z = \text{diag}(2, \dots, 2, 1, \dots, 1)$ .  $\square$

**Lemma 3.2** *Let  $Z$  be the null-space basis of the off-diagonal block  $C^T$  constructed in Step 1 of Algorithm 3.1. Then there exist positive constants  $c_7$  and  $c_8$  such that for the singular values of the matrix block  $Z^T B$  it follows  $sv(Z^T B) \subset [c_7 h, c_8]$ .*

*Proof.* Define the graph  $G_B = (V_B, E_B)$  as follows. Let  $V_B = \{0, 1, \dots, NE\}$ . Let  $(i, j)$  be an edge in  $E_B$  whenever elements  $i$  and  $j$  are connected by an interior inter-element face. Furthermore, let there is an edge  $(0, i) \in E_B$  for each Dirichlet boundary condition defined on some element  $i$ . Note that there can be more edges between the node 0 and some node  $i \neq 0$ . Moreover, introduce the mapping  $d : V_B \rightarrow \mathbb{R}$  such that  $d_0 = 0$  and  $\sum_{i \in V_B} d^2(i) = 1$  and the induced mapping  $w_d : E_B \rightarrow \mathbb{R}$  satisfying the formula  $w_d(e) = |d(j) - d(i)|$  for  $e = (i, j) \in E_B$ .

Consider a tree  $T = (V_B, E_T)$  rooted in the node 0 such that  $|E_T| = |V_B| - 1$ . Let  $k$  be its arbitrary node. Using the Schwarz inequality we get

$$d^2(k) \leq \ell(k) \sum_{e \in P(0, k)} w_d^2(e), \quad (3.13)$$

where  $P(0, k)$  is an unique path between the nodes 0 and  $k$  in  $T$  (where we do not take into account the orientation of the edges) and  $\ell(k)$  is its length. Summing the inequalities in (3.13) for all  $k \in V_B$  we get

$$1 \leq \sum_{k \in V_B} \ell(k) \sum_{e \in P(0, k)} w_d^2(e) \leq \ell_{max}^2 \sum_{e \in E_T} w_d^2(e) \leq \ell_{max}^2 \sum_{e \in E_B} w_d^2(e), \quad (3.14)$$

where  $\ell_{max}$  is the length of the path of maximum length from the node 0 to some node  $i \in V_B$ . This implies that

$$\sum_{e \in E_B} w_d^2(e) \geq \ell_{max}^{-2}. \quad (3.15)$$

Consider now the matrix  $Z^T B \in \mathbb{R}^{NIF + NDC, NE}$ . Its rows correspond to Dirichlet boundary conditions and interior inter-element faces. There is only one nonzero in the rows corresponding to Dirichlet boundary conditions (either +1 or -1) placed in the column of the element where this condition is imposed. In the rows which correspond to the interior faces, there are exactly two nonzeros, equal to +1 and -1, respectively. Consider a vector  $d = (d_0, d_1, \dots, d_{NE})^T$  such that  $d(0) = 0$ . Clearly, from the definition of  $G_B$  we have

$$\sum_{e \in E_B} w_d^2(e) = \| (Z^T B) \hat{d} \|^2, \quad (3.16)$$

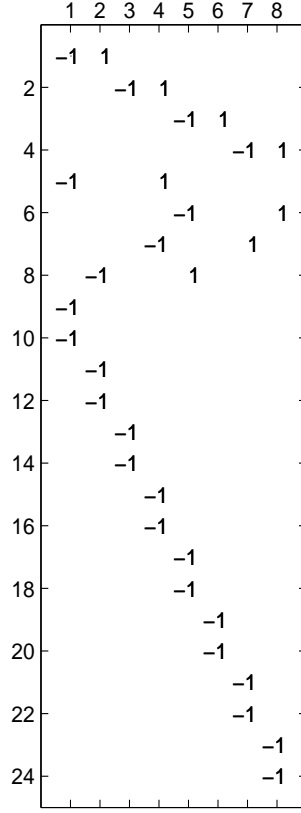


Figure 7: Null-space basis of the off-diagonal block  $Z^T B$  from our example in Figure 1

where  $\hat{d} = (d_1, \dots, d_{NE})^T$ . Consequently, using the Courant-Fischer theorem and (3.15) we have

$$\sigma_{\min}(Z^T B) = \min_{\|\hat{d}\|_2=1} \|(Z^T B)\hat{d}\| \geq \ell_{max}^{-1}. \quad (3.17)$$

The uniformly regular mesh refinement provides that  $\ell_{max} = O(NE^{-1/3}) = O(h)$ . Therefore, there is a positive constant  $c_7$  such that

$$\sigma_{\min}(Z^T B) \geq c_7 h. \quad (3.18)$$

Since  $\|Z^T B\| \leq \|Z\| \|B\| \leq \sqrt{2}\sqrt{5}$ , the singular values of  $Z^T B$  are bounded by a positive constant  $c_8 = \sqrt{10}$  and this completes the proof.  $\square$

**Lemma 3.3** *Let  $Z$  be the null-space basis of the off-diagonal block  $C$  constructed in Step 1 of Algorithm 3.1. Then for the spectrum of the projected matrix (3.12) it follows*

$$\sigma \begin{pmatrix} Z^T \mathbf{A} Z & Z^T B \\ B^T Z & \end{pmatrix} \subset \left[ \frac{1}{2}(c_1 - \sqrt{c_1^2 + 4c_8^2}), -\frac{c_7^2}{c_2} h^2 + O(h^4) \right] \cup [c_1, c_2 + \sqrt{c_2^2 + c_8^2}]$$

*Proof.* The proof of the lemma follows from (Rusten and Winther 1992), Lemma 2.1 and from the the statements of Lemma 3.1 and Lemma 3.2.  $\square$

It is well-known that applying the minimal residual method to the projected system (3.12) the relative residual norm of the  $n$ -th approximate solutions  $u_2^n$  and  $p^n$ ,  $n = 0, 1, \dots$  can be bounded (see also Greenbaum, 1997, pag. 54, Wathen, Fischer and Silvester, 1997, pag. 234) as follows

$$\frac{\left\| \begin{pmatrix} Z^T(q_1 - \mathbf{A}u_1) \\ q_2 - B^T u_1 \end{pmatrix} - \begin{pmatrix} Z^T \mathbf{A} Z & Z^T B \\ B^T Z & \end{pmatrix} \begin{pmatrix} u_2^n \\ p^n \end{pmatrix} \right\|}{\left\| \begin{pmatrix} Z^T(q_1 - \mathbf{A}u_1) \\ q_2 - B^T u_1 \end{pmatrix} - \begin{pmatrix} Z^T \mathbf{A} Z & Z^T B \\ B^T Z & \end{pmatrix} \begin{pmatrix} u_2^0 \\ p^0 \end{pmatrix} \right\|} \leq 2 \left( \frac{1 - \sqrt{\frac{bc}{ad}h}}{1 + \sqrt{\frac{bc}{ad}h}} \right)^{[n/2]}, \quad (3.19)$$

where  $a = 1/2(\sqrt{c_1^2 + 4c_8^2} - c_1)$ ,  $b = c_7^2/c_2$ ,  $c = c_1$  and  $d = c_2 + \sqrt{c_2^2 + c_8^2}$ . From (3.19) we obtain the bound for the asymptotic convergence factor in the form

$$\lim_{n \rightarrow \infty} \left( \frac{\left\| \begin{pmatrix} Z^T(q_1 - \mathbf{A}u_1) \\ q_2 - B^T u_1 \end{pmatrix} - \begin{pmatrix} Z^T \mathbf{A} Z & Z^T B \\ B^T Z & \end{pmatrix} \begin{pmatrix} u_2^n \\ p^n \end{pmatrix} \right\|}{\left\| \begin{pmatrix} Z^T(q_1 - \mathbf{A}u_1) \\ q_2 - B^T u_1 \end{pmatrix} - \begin{pmatrix} Z^T \mathbf{A} Z & Z^T B \\ B^T Z & \end{pmatrix} \begin{pmatrix} u_2^0 \\ p^0 \end{pmatrix} \right\|} \right)^{1/n} \leq 1 - c_9 h + O(h^2).$$

Clearly, the bounds for the rate of convergence of the minimal residual method applied to the indefinite projected system depend linearly on the discretization parameter  $h$ . Moreover, since we have used, in fact, the assumption on the symmetric spectrum for the projected matrix, this bound may be an overestimate of the actual rate of convergence of the unpreconditioned minimal residual method (Wathen et al. 1997). The preconditioning of the projected matrix (3.12) can be incorporated as well and many other approaches are possible.

### 3.4 Step 5

Since the matrix block  $C$  has orthogonal set of columns, the unknown vector  $\lambda$  is given as  $\lambda = D^{-1}C^T(q_1 - \mathbf{A}u - Bp)$  which is easy to solve due to the fact that  $D = C^T C = \text{diag}(2, \dots, 2, 1, \dots, 1)$  is diagonal matrix.

## 4 Numerical experiments

In this section we give the results from numerical experiments. Two sets of matrices have been considered.

The first set corresponds to a model potential fluid flow problem in a rectangular domain with homogeneous Neumann on the top and bottom and Dirichlet conditions prescribed on the rest of the boundary. The tensor of hydraulic permeability is constant in the whole domain. Uniform prismatic discretization with the varying mesh size  $h$  was used. In Table 1, we give

Table 1: *Model potential fluid flow problem on a rectangular domain with a constant tensor of hydraulic permeability. The quantity  $NE$  denotes the number of elements,  $NIF$  stands for the number of interior inter-element faces,  $NDC$  and  $NNC$  denotes the number of Dirichlet and Neumann boundary conditions, respectively. The dimension of the null-space of  $(B\ C)^T$  is given as  $NZ1 = 4 * NE - NIF - NNC$  and the dimension of the null-space of  $C^T$  is given as  $NZ2 = 5 * NE - NIF - NNC$ .*

Discretization parameters					Dimension of null-spaces	
$h$	$NE$	$NIF$	$NDC$	$NNC$	$NZ1$	$NZ2$
1/5	250	525	100	100	375	625
1/10	2000	4600	400	400	3000	5000
1/15	6750	15975	900	900	10125	16875
1/20	16000	38400	1600	1600	24000	40000
1/25	31250	75625	2500	2500	46875	78125
1/30	54000	131400	3600	3600	81000	135000
1/35	87750	209475	4900	4900	138625	226375
1/40	128000	313600	6400	6400	192000	320000

the values of discretization parameters  $NE = 2/h^3$ ,  $NIF$ ,  $NNC$  and  $NDC$  for different values of  $h$ . The dimension of the resulting indefinite system matrix (1.3) can be computed as  $N = 6 * NE + NIF + NNC$  and the number of columns of the off-diagonal block  $(B\ C)$  is given by  $NBC = NE + NIF + NNC$ . In Table 1 we report the dimension  $NZ1$  of the null-space of the whole block  $(B\ C)^T$  and the dimension  $NZ2$  of the null-space of the block  $C^T$  for all values of mesh size  $h$ .

Table 2 reports the inclusion sets of the spectrum of matrix blocks  $A$  and  $(B\ C)$  as well as of the whole symmetric indefinite matrix from (1.3). The extremal singular values of the block  $(B\ C)$  (squared roots of the extremal eigenvalues of the matrix  $(B\ C)^T(B\ C)$ ) and the extremal positive and negative eigenvalues of the whole indefinite matrix were approximated by the eigenvalues of the symmetric tridiagonal matrix obtained from 2000 steps of the symmetric Lanczos algorithm (Golub and van Loan 1996). The eigenvalue computation of the resulting tridiagonal matrix was done using the LAPACK double precision subroutine DSYEV (Anderson, Bai, Bischof, Demmel, Dongarra, Croz, Greenbaum, Hammarling, McKenney, Ostrouchov and Sorensen 1992). The extremal eigenvalues of the diagonal matrix block  $A$  were computed directly by the LAPACK symmetric eigenvalue solver element by element. It is clear from Table 2 that the computed eigenvalues of the block  $A$  are in a good agreement with the result (1.4) and after scaling (1.6) the spectrum of the diagonal block  $\mathbf{A}$  becomes independent of  $h$ . Similarly the computed extremal singular values of  $(B\ C)$  sound well with (1.5).

Table 2: *Model potential fluid flow problem on a rectangular domain with a constant tensor of hydraulic permeability. Spectral properties of the matrix blocks and the whole indefinite system for different values of mesh size  $h$ . The extremal eigenvalues and singular values were approximated using the symmetric Lanczos process and subsequent computation of the eigenvalues of resulting tridiagonal form.*

$h$	spectrum of matrix blocks		whole indefinite system	
	spectrum of $A$	s.v. of $(B\ C)$	negative part	positive part
1/5	[0.16e-2, 0.1e-1]	[0.181e0, 2.63]	[-2.63 , -0.180e0]	[0.166e-2, 2.63]
1/10	[0.33e-2, 0.2e-1]	[0.927e-1, 2.64]	[-2.64, -0.898e-1]	[0.335e-2, 2.64]
1/15	[0.50e-2, 0.3e-1]	[0.622e-1, 2.64]	[-2.64, -0.354e-1]	[0.509e-2, 2.65]
1/20	[0.66e-2, 0.4e-1]	[0.467e-1, 2.64]	[-2.64, -0.413e-1]	[0.679e-2, 2.65]
1/25	[0.83e-2, 0.5e-1]	[0.374e-1, 2.65]	[-2.64, -0.311e-1]	[0.861e-2, 2.65]
1/30	[0.99e-2, 0.6e-1]	[0.312e-1, 2.65]	[-2.64, -0.241e-1]	[0.104e-1, 2.65]
1/35	[0.11e-1, 0.7e-1]	[0.268e-1, 2.65]	[-2.64, -0.190e-1]	[0.120e-1, 2.65]
1/40	[0.13e-1, 0.8e-1]	[0.234e-1, 2.65]	[-2.64, -0.152e-1]	[0.136e-1, 2.65]

Approaches based on the computation of the null-space basis of the whole off-diagonal block  $(B\ C)^T$  are discussed first. In Table 3, we compare the memory requirement (denoted as  $NNZ(Z1)$ ) and the computational cost of constructing the null-space basis and iteration counts for the (smoothed) conjugate gradient method applied to the projected positive definite system in Algorithm 2.1, Step 3. For computation of the null space basis  $Z$  (such that  $(B\ C)^T Z = 0$ ) we use the sparse QR factorization (for details see Arioli, 2000b) and the fundamental cycle null space basis. Sparse QR decomposition was computed with the code MA49 from the Harwell Subroutine Library (HSL 2000). Fundamental cycle null space basis is based on the shortest path spanning tree of  $G_S$ , SDS algorithm from (Deo et al. 1982). In Table 3 we further give the number of nonzero elements (denoted as  $NNZ(QR)$ ) necessary for storing the orthogonal and upper triangular factors of  $(B\ C)$ , the ratio  $NNZ(R)/NNZ(QR)$ , and the time of computation in seconds (in brackets). All experiments were performed on the SGI Origin 200 with processor R10000. The results from Table 3 indicate that the use of sparse QR factorization becomes prohibitive for last two values of  $h$  and the ratio  $NNZ(R)/NNZ(QR)$  tends to approach the value 1/2 with the decrease of  $h$ . It is also clear that although the number of nonzeros in the fundamental cycle null-space basis  $NNZ(Z1)$  is significantly less than the number of nonzeros in the factors Q and R. This is even more profound for the computation time. In the iterative part the initial approximation of  $u_2$  was set to zero, the relative residual norm  $\frac{\|r_n\|}{\|r_0\|} = 10^{-8}$  was used as the stopping criterion. Only unpreconditioned case is considered in this case. In the case of the QR approach we included the number of iterations and timing in seconds for

Table 3: *Model potential fluid flow problem on a rectangular domain with a constant tensor of hydraulic permeability. Memory requirements of the approaches using the null-space basis of the whole block  $(B\ C)^T$ , iteration counts and timings (in brackets) of the conjugate gradient method applied to the projected positive definite system.*

$h$	memory requirements		iteration counts	
	QR approach $NNZ(QR)$	fund. cycles $NNZ(Z1)$	QR/SN	fund. cycles UN
1/5	28360/0.26 (3e-2)	3360 (7e-3)	22/20 (0.17/0.44)	71 (0.08)
1/10	410466/0.30 (0.97)	47120 (0.07)	22/21 (1.87/4.23)	163 (1.57)
1/15	1979203/0.34 ( 9.73)	226780 (0.30)	22/21 (8.48/17.1)	252 (19.9)
1/20	7120947/0.39 (59.6)	697840 (0.93)	22/21 (25.0/48.6)	346 (75.9)
1/25	18105131/0.42 (237)	1675800 (2.21)	22/21 (57.2/107)	438 (222)
1/30	40837823/0.44 (980)	3436160 (4.60)	21/21 (110/214)	523 (510)
1/35	—	6314420 (8.64)	—	596 (1009)
1/40	—	10706080 (14.8)	—	670 (1900)

two possible approaches using either both factors Q and R (denoted in Table 3 as QR, see also Arioli, 2000b) or solution via seminormal equations (SN) (for details we refer to Perugia et al., 1999) which uses only the upper triangular factor R from the QR factorization. The latter then necessarily leads to approximately double cost of matrix-vector multiplications in the iterative solver. For the case of fundamental cycle basis we report the number of iterations and timings when the matrix  $Z^T \mathbf{A} Z$  is unpreconditioned and kept in factorized form (UN). We have noticed that simple preconditioning strategies like Jacobi (note that the system matrix was initially scaled) or IC (using explicit matrix assembling) do not help to improve the results. It is clear from iteration counts in Table 3 that number of iterations remains in the case of the QR factorization independent of the mesh size  $h$  while the number iterations in the approach based on the fundamental cycle basis increases more than linearly with  $h$ , which leads to higher timings also in the iterative part of the process.

In Table 4 we compare the approaches based on the null-space basis of the off-diagonal block  $C^T$ . The iteration counts and times of the preconditioned conjugate gradient method applied to the projected indefinite system in Algorithm 3.1, Step 3 are discussed for positive definite block diagonal preconditioner (IP) and indefinite (constraint) preconditioner (IQ), where the inverses of corresponding matrices are approximated by the incomplete Cholesky decomposition IC(0) (see e.g. numerical experiments in (Perugia et al. 1999) and references therein). For comparison we give also results for the preconditioner based on the approximate factorization of the indefinite system (NS) developed originally by Nash and Sofer (Nash and Sofer 1996, pag. 52, formula (3.2)). It is clear from Table 4 that the computed results are in a good agreement with the theoretical result (3.19) developed in previous section. Indeed, the number of iterations required for reducing the relative residual norm to  $10^{-8}$  increases linearly with the decrease of  $h$ . The results with the IQ and IP preconditioners are reasonably good, better than the results for the NS preconditioner which has, on the other hand, more potential for parallel implementation. We note that the stopping criterion and the level  $10^{-8}$  used throughout the paper leads usually to much higher accuracy of the approximate solution than that required in practice in a finite element method framework. For a thorough discussion we refer to (Arioli 2000a).

Iterative solution of the projected indefinite system (Algorithm 3.1, Step 3) is compared with the approach based on the sparse QR of the off-diagonal block  $B^T Z$ . We report the memory requirement, the ratio  $NNZ(R)/NNZ(QR)$  and the timings for the computation of the factors together with the number of nonzeros in the null-space basis  $Z$  (denoted as  $NNZ(Z2)$  here). We note that since the latter is equal to  $2 * NIF + NDC$  the time for the construction of  $Z$  is negligible and it is not included in Table 4. Similarly to Table 3 in Table 4 we also included iteration counts and time for the iterative part of the QR approach that uses either both Q and R factors (QR) or only the factor R (SN).

The first set of matrices was obtained from a discretization of a model potential fluid flow problem with a constant tensor of permeability in a rectangular domain. Theoretical analysis and numerical experiments for the first set clearly indicate that the conditioning of the positive definite block  $\mathbf{A}$  does not affect dramatically the behavior of the conjugate gradient method used in the iterative part of the whole solution process. In addition, the linear dependence (or independence in the case of the QR approach) in the iteration counts of the conjugate gradient method on mesh size does not represent a serious difficulty in terms of the computational complexity, especially due to the fact that in the three-dimensional case even large values of mesh size ( $h < 1/40$ ) lead to a rather large problems, so further decrease of  $h$  would lead to practically infeasible system anyway. The second set of matrices comes from a real-world application of underground water flow modelling in the area of Stráž pod Ralskem in northern Bohemia. Realistic values of hydraulic permeability lead to the positive definite diagonal block  $A$  with the condition number which may become a dominating factor for the behavior of the



Table 4: *Model potential fluid flow problem on a rectangular domain with a constant tensor of hydraulic permeability. Number of nonzeros of the projected matrix onto the null-space basis  $Z$  of the block  $C^T$  (see Algorithm 3.1, Step 3), iteration counts and timings of the preconditioned conjugate gradient method applied to the orthogonally projected indefinite system compared to the memory requirements and iteration counts for the solution of the same system based on the sparse QR decomposition of its off-diagonal block  $Z^T B$ .*

$h$	NNZ( $Z_2$ )	pure iteration	sparse QR	
		IP/IQ/NS	NNZ(QR)	QR/SN
1/5	14375	62/35/55 (0.05/0.03/0.10)	20834/0.20 (0.02)	18/14 (0.09/0.09)
1/10	123000	103/64/108 (0.68/0.48/1.60)	356267/0.28 (0.35)	19/16 (1.11/0.89)
1/15	424125	144/93/160 (5.17/3.79/13.6)	1840670/0.34 (3.14)	21/15 (6.09/4.63)
1/20	1016000	186/118/212 (20.2/14.2/49.6)	6322468/0.38 (17.97)	21/15 (18.3/14.94)
1/25	1996875	225/145/265 (50.8/37.4/122)	16661544/0.42 (86.6)	23/15 (47.0/27.8)
1/30	3465000	260/174/311 (111/84.2/268)	40669978/0.44 (584)	22/15 (96.7/85.5)
1/35	5518625	295/204/362 (224/173/520)	—	—
1/40	8256000	331/230/412 (383/295/941)	—	—

Table 5: *Realistic problems from underground water flow modelling in Stráž pod Ralskem. The name of problem, the number of elements  $NE$  and the dimension of the whole indefinite system  $N = 6 * NE + NIF + NNC$ . The spectral properties of the matrix blocks  $A$  and  $(B C)$  for all matrices. The extremal eigenvalues and singular values were approximated using the symmetric Lanczos process and subsequent computation of the eigenvalues of the resulting tridiagonal form*

name	discretization parameters		spectrum of matrix blocks	
	$NE$	$N$	spectrum of $A$	s.v. of $(B C)$
k1san	14700	126980	[0.21e-4,0.80e2]	[0.26e-1,2.64]
olesnik0	24300	210060	[0.74e-4,0.91e3]	[0.20e-1,2.64]
dpretok	36300	313940	[0.77e-3,0.12e5]	[0.17e-1,2.64]
turon	50700	438620	[0.19e-4,0.96e2]	[0.14e-1,2.64]

iterative solver applied onto a projected system. This is illustrated in the following experiments. In Table 5 we give a description of the problems together with the inclusion sets for the extremal eigenvalues of  $A$  and extremal singular values of  $(B C)$  computed as for the model problem in Table 2.

Similarly as before, in Tables 6 and 7 we report the same quantities for the second set of matrices. It follows from Table 6 that also here the memory requirements and the times for computing the (sparse) QR decomposition are substantially larger than in the case of construction of the fundamental cycle null-space basis. For realistic examples, however, the iteration counts and timings for the conjugate gradient method applied on the system with  $Z^T A Z$  (UN) dramatically increase and for last two examples exceed 9999 iterations. The iteration counts and timings for both QR approaches (QR and SN), on the other hand, remain comparable to the results in Table 3. Iterations counts and timings for the positive definite block-diagonal preconditioner (IP) and indefinite (constraint) preconditioner (IQ) in Table 7 are comparable to results in Table 4 and show that this approach is very efficient even for realistic problems. The Nash-Sofer preconditioning is, however, substantially worse for problems with the dominant tensor of hydraulic permeability. The QR approach applied to projected indefinite system seems to be an useful approach. Nevertheless, it may fail in some cases.

## 5 Conclusions

In this paper we have compared the computation efficiency of several dual methods for the solution of augmented linear systems coming from the mixed-hybrid finite element approximation of the potential fluid flow problem in porous media. We have discussed the approach based on the computation of a null-space basis either of the whole off-diagonal block  $(B C)^T$  or its

Table 6: *Realistic problems from underground water flow modelling in Stráž pod Ralskem. Memory requirements of the approaches using the null-space basis of the whole block ( $B C$ ), iteration counts and timings of conjugate gradient method applied to the projected positive definite system.*

Name	memory requirements		iteration counts	
	QR approach $NNZ(QR)$	fund. cycles $NNZ(Z1)$	QR approach QR/SN	fund. cycles UN
k1san	3674914/0.35 (38.1)	983640 (0.95)	44/44 (34.4/78.4)	2635 (703)
olesnik0	6626296/0.35 (102)	2057880 (2.03)	58/58 (79.1/181)	4544 (2397)
dpretok	10453556/0.42 (224)	3719320 (3.73)	37/37 (78.6/187)	>9999 (—)
turon	15398104/0.41 (434)	6095960 (6.62)	36/36 (116/265)	>9999 (—)

Table 7: *Realistic problems from underground water flow modelling in Stráž pod Ralskem. Number of nonzeros of the projected matrix onto the null-space basis  $Z$  of the block  $C^T$  (see Algorithm 3.1, Step 3), iteration counts and timings of preconditioned conjugate gradient method applied to the orthogonally projected indefinite system compared to the memory requirements and iteration counts for the solution of the same system based on the sparse QR decomposition of its off-diagonal block  $Z^T B$ .*

Name	NNZ(Z2)	pure iteration	sparse QR	
		IP/IQ/NS	$NNZ(QR)$	QR/SN
k1san	862820	184/76/3156 (17.1/7.86/629)	3284826/0.33 (5.80)	93/93 (51.1/59.1)
olesnik0	1426140	287/103/5582 (44.9/18.4/1846)	6007628/0.34 (13.7)	> 9999 (—)
dpretok	2130260	112/51/1705 (26.3/14.1/865)	9495418/0.34 (26.1)	23/23 (35.6/42.3)
turon	2975180	155/80/442 (56.0/32.7/325)	14426491/0.35 (49.6)	26/26 (59.0/72.1)

orthogonal part  $C^T$ . We have shown that although the sparse QR decomposition of the off-diagonal block is prohibitive for large problems in terms of memory requirements for storing the factors, its iterative part is very efficient (although the cost of iteration is rather high) and not dependent on the mesh size. On the other hand, the construction of the fundamental cycle null space basis is very fast, but the iteration counts are much worse. In addition, since the basis is non-orthogonal the number of iterations in the iterative part is no longer independent of the mesh size and in the case of more difficult tensors of hydraulic permeability may become very large. The cost of iteration is, however, due to higher sparsity of the basis lower than for the QR approach. Good preconditioning of the projected matrix  $Z^T \mathbf{A} Z$  may be of help especially for realistic examples and in general it is an open question. For examples with moderate values of hydraulic permeability it seems useful to keep the projected matrix in factorized form.

The approach based on the null space of the off-diagonal block  $C^T$  seems to be more efficient both in terms of the memory requirements and computational cost. The null-space basis of  $C^T$  can be explicitly given and the construction of the resulting projected (mixed) system is cheap. Again, the sparse QR decomposition of  $Z^T B$  (if it is not prohibitive) leads to lower iteration counts and times in the iterative part. Numerical experiments on all examples indicate that the pure iterative solution of the projected and still indefinite system is a very promising approach especially together with some efficient preconditioning technique like the indefinite (constraint) or block-diagonal positive definite preconditioner. Moreover, following the discussion of Section 3.3, we can take advantage of (3.12) for an efficient parallel implementation of the matrix by vector product.

## 6 Acknowledgment

Authors would like to thank Marco Manzini for helping us with experiments and useful comments on the implementation of our codes. We are also indebted to the Dept. of Mathematical Modelling in DIAMO, s.e., Stráž pod Ralskem for providing us realistic numerical examples for the experimental part of this paper.

## References

- Amit, R., Hall, C. and Porsching, T. (1981), ‘An application of network theory to the solution of implicit Navier-Stokes difference equations’, *J. Comp. Phys.* **40**, 183–201.
- Anderson, E., Bai, Z., Bischof, C., Demmel, J., Dongarra, J., Croz, J. D., Greenbaum, A., Hammarling, S., McKenney, A., Ostrouchov, S. and Sorensen, D. (1992), *LAPACK User’s Guide*, SIAM, Philadelphia.
- Arioli, M. (2000a), A stopping criterion for the conjugate gradient algorithm in a finite element method framework, Technical Report Tech. Report IAN-1179, IAN.
- Arioli, M. (2000b), ‘The use of QR factorization in sparse quadratic programming and backward error issues’, *SIAM J. Matrix Anal. and Applics.* **21**, 825–839.
- Bergamaschi, L., Mantica, S. and Saleri, F. (1994), Mixed finite element approximation of Darcy’s law in porous media, Technical report, CRS4, Cagliari, Italy.
- Brezzi, F. and Fortin, M. (1992), *Mixed and Hybrid Finite Element Methods*, Springer-Verlag, Berlin.
- Burkardt, J., Hall, C. and Porsching, T. (1986), ‘The dual variable method for the solution of compressible fluid flow problems’, *SIAM J. Alg. Disc. Meth.* **7**, 476–483.
- Cassell, A., de C. Henderson, J. and Kaveh, A. (1974), ‘Cycle bases for the flexibility analysis of structures’, *Int. J. Num. Meth. Engng.* **8**, 521–528.
- Coleman, T. and Pothen, A. (1986), ‘The null space problem I. Complexity’, *SIAM J. Alg. Disc. Meth.* **7**, 527–537.
- Deo, N., Prabhu, G. and Krishnamoorthy, M. (1982), ‘Algorithms for generating fundamental cycles in a graph’, *ACM Trans. Math. Software* **8**, 26–42.
- Duff, I., Gould, N., Reid, J., Scott, J. and Turner, K. (1991), ‘Factorization of sparse symmetric indefinite matrices’, *IMA J. Numer. Anal.* **11**, 181–204.
- Elman, H. (1996), ‘Multigrid and Krylov subspace methods for the discrete stokes equations’, *Int. J. Numerical Methods in Fluids* **22**, 755–770.
- Elman, H. and Golub, G. (1994), ‘Inexact and preconditioned Uzawa algorithms for saddle point problems’, *SIAM J. Numer. Anal.* **31**, 1645–1661.
- Garey, M. and Johnson, D. (1979), *Computers and Intractability: A Guide to the Theory of NP-Completeness.*, W.H. Freeman, San Francisco.

- Gibbs, N., Jr., W. P. and Stockmeyer, P. (1976), ‘An algorithm for reducing the bandwidth and profile of a sparse matrix’, *SIAM J. Numer. Anal.* **13**, 236–250.
- Golub, G. and van Loan, C. (1996), *Matrix Computations*, 3 edn, The Johns Hopkins University Press, Baltimore.
- Greenbaum, A. (1997), *Iterative Methods for Solving Linear Systems*, SIAM, Philadelphia.
- Hall, C. (1985), ‘Numerical solution of navier-stokes problems by the dual variable method’, *SIAM J. Alg. Disc. Meth.* **6**, 220–236.
- Heath, M., Plemmons, R. and Ward, R. (1984), ‘Sparse orthogonal schemes for structural optimization using the force method’, *SIAM J. Sci. Stat. Comput.* **5**, 514–532.
- Henderson, J. and Maunder, E. (1969), ‘A problem in applied topology: on the selection of cycles for the flexibility analysis of skeletal structures’, *J. Inst. Maths. Applics.* **5**, 254–269.
- Hestenes, M. and Stiefel, E. (1952), ‘Method of conjugate gradients for solving linear systems’, *J. Res. Nat. Bureau Standards* **49**, 409–435.
- HSL (2000), ‘A collection of Fortran codes for large scale scientific computation’. <http://www.cse.clrc.ac.uk/Activity/HSL>.
- Kaasschieter, E. and Huijben, A. (1992), ‘Mixed-hybrid finite elements and streamline computation for the potential flow problem’, *Numerical Methods for Partial Differential Equations* **8**, 221–266.
- Kaveh, A. (1984), ‘A combinatorial optimization problem: optimal generalized cycle basis’, *Comput. Methods Appl. Mech. Engrg.* **20**, 983–998.
- Lukšan, L. and Vlček, J. (1998), ‘Indefinitely preconditioned inexact newton method for large sparse equality constrained non-linear programming problems’, *Numer. Linear Algebra with Appl.* **5**, 219–247.
- Maryška, J., Rozložník, M. and Tůma, M. (1995), ‘Mixed-hybrid finite element approximation of the potential fluid flow problem’, *J. Comput. Appl. Math.* **63**, 383–392.
- Maryška, J., Rozložník, M. and Tůma, M. (1996), ‘The potential fluid flow problem and the convergence rate of the minimal residual method’, *Numer. Linear Algebra with Applications* **3**(6), 525–542.
- Maryška, J., Rozložník, M. and Tůma, M. (2000), ‘Schur complement systems in the mixed-hybrid finite element approximation of the potential fluid flow problem’, *SIAM J. Sci. Comput.* **22**, 704–723.

- Murthy, K. G. (1992), *Network Programming*, Prentice Hall, Englewood Cliffs, NJ.
- Nash, S. and Sofer, A. (1996), ‘Preconditioning reduced matrices’, *SIAM J. Matrix Anal. Appl.* **17**, 47–68.
- Paige, C. C. and Saunders, M. A. (1975), ‘Solution of sparse indefinite systems of linear equations’, *SIAM Journal on Numerical Analysis* **12**, 617–629.
- Perugia, I., Simoncini, V. and Arioli, M. (1999), ‘Linear algebra methods in a mixed approximation of magnetostatic problems’, *SIAM J. Sci. Comput.* **21**, 1085–1101.
- Plemmons, R. and White, R. (1990), ‘Substructuring methods for computing the nullspace of equilibrium matrices’, *SIAM J. Matrix Anal. Appl.* **11**, 1–22.
- Pothen, A. (1989), ‘Sparse null basis computations in structural optimization’, *Numer. Math.* **55**, 501–519.
- Rusten, T. and Winther, R. (1992), ‘A preconditioned iterative method for saddle point problems’, *SIAM J. Math. Anal. Appl.* **13**, 887–904.
- Saad, Y. (1996), *Iterative Methods for Sparse Linear Systems*, PWS Publishing Company, ITP.
- Silvester, D. and Wathen, A. (1993), ‘Fast iterative solution of stabilized stokes systems, part i: Using simple diagonal preconditioners’, *SIAM J. Numer. Anal.* **30**, 630–649.
- Stiefel, E. (1955), ‘Relaxationsmethoden bester Strategie zur Lösung linearer Gleichungssysteme’, *Commentarii Mathematici Helvetici* **29**, 157–179.
- Tůma, M. (n.d.), A note on  $LDL^T$ -decomposition of sparse symmetric quasisemidefinite matrices, submitted to SIMAX, (available also from <http://www.uivt.cas.cz/~tuma>).
- Wagner, C., Kinzelbach, W. and Wittum, G. (1997), ‘Schur-complement multigrid: A robust method for groundwater flow and transport problems’, *Num. Math.* **75**, 523–545.
- Wathen, A., Fischer, B. and Silvester, D. (1997), ‘The convergence of iterative solution methods for symmetric and indefinite linear systems’.